SG 6475

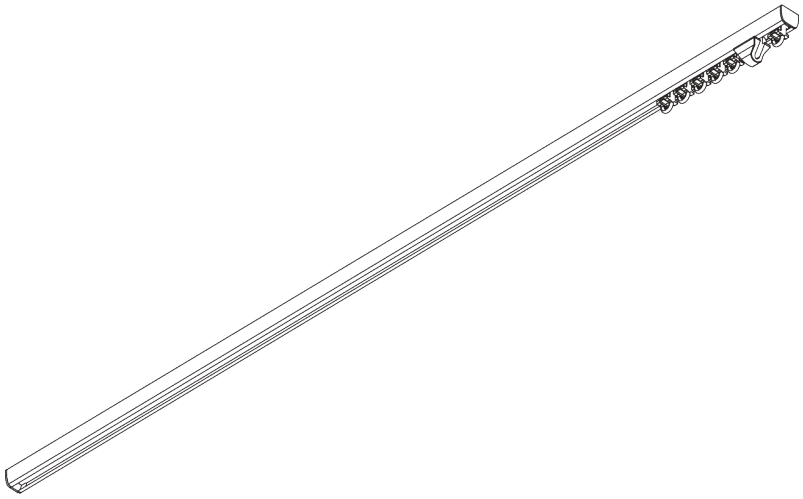

PRODUCT INFORMATION

- ***Operation:*** *hand*
- ***Range:*** *S - M*
- ***Fitting:*** *ceiling*
- ***Colours:*** *white RAL 9016 or anodised aluminum, special colours possible*
- ***Fabrics:*** *refer to Silent Gliss fabric collection*

Features:

- *2-component (2C) glider technology*
- *Wave (2C)*
- *Bendable*

SYSTEM SPECIFICATION

A. PROFILE

Profile and bending information



SG 6475p

Profile

Radius:
8 cm, 12 cm, 16 cm, >25 cm

B. HOW TO MEASURE

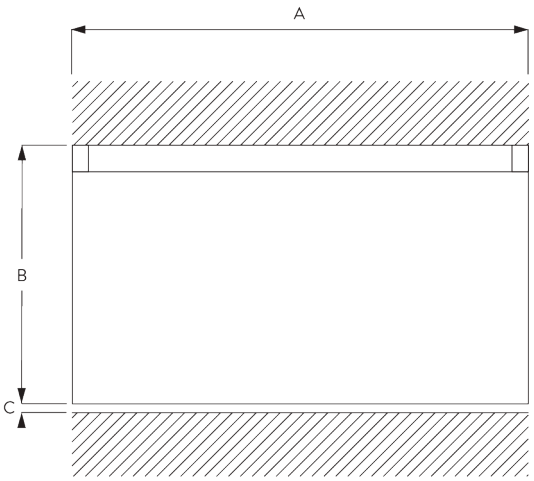

A: System width
B: System height
C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 6475 Hand Drawn Curtain Track System. Comprises aluminium profile SG 6475 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 11130 at 14/m, 2 end covers SG 6476 and 2 SG 6065 stops. Top fixed with brackets SG 3060 at max. 300 mm centres. Silent Gliss Wave option is available.

SV

Silent Gliss SG 6475 handdragssystem. Består av aluminiumprofil SG 6475 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 11300 SILENT TRACK glid per meter, 2 st SG 6476 ändskydd samt 2 st SG 6065 vridstopp per system. Takmonteras med fäste SG 3060 c/c 300 mm. Kan användas med system Wave.

NO

Silent Gliss SG 6475 Manuell gardinskinne. Består av aluminiumprofil SG 6475 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter, 2 stk 6476 endelokk og 2 stk SG 6065 vristopp pr system. Takmonteres med feste SG 3060 c/c 300 mm. Kan kombineres med Wave system.

DA

Silent Gliss SG 6475 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 6475 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 11130 glidere pr. m og 2 stk. SG 6476 endelåg samt 2 stk. SG 6065 endestop. Loftmonteres med beslagene SG 3060 med højst 300 mm afstand. Kan bruges med Silent Gliss Wave.

FITTING

A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.

Fixing points



B. CEILING FITTING

Clamp SG 3060

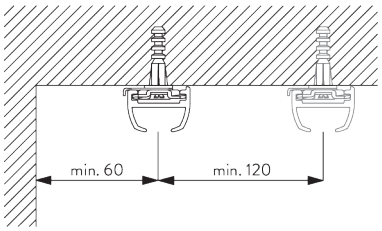



SG 3060
Clamp

SYSTEM OPTIONS

A. WAVE





SG 11295 SG 11302

Standard components:

- *SG 11295 End stop*
- *SG 11302 Wave 2C glider cord 80 mm*

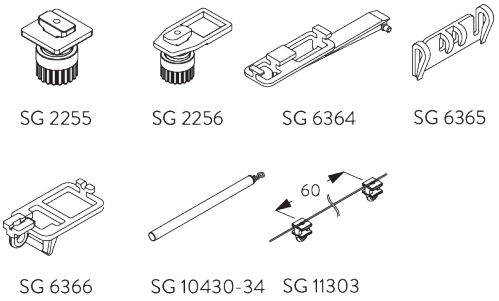

Optional components (min. radius >25 cm):

- *SG 2255 Brake*
- *SG 2256 Brake*
- *SG 6364 Wave extension*
- *SG 6365 Wave hanger*
- *SG 6366 Wave carrier for draw rod*
- *SG 10430-34 Draw rod*
- *SG 11303 Wave 2C glider cord 60 mm*

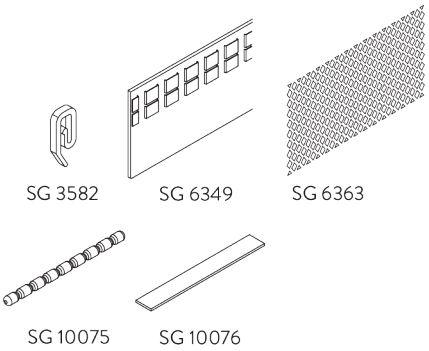

Curtain components:

- *SG 3582 Hook*
- *SG 6349 Wave curtain tape*
- *SG 6363 Wave top hemming tape*
- *SG 10075 Lead weight 50 gr/m*
- *SG 10076 Fabric weight*

Wave stack depth - 2C glider cord (standard components)

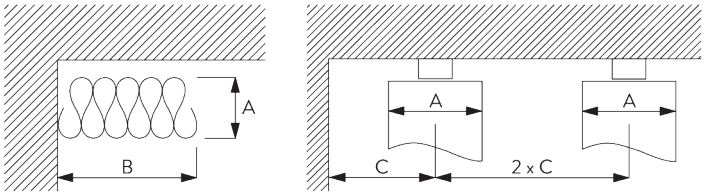

A = Stack depth
B = Stack size
C = Min. distance

2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80

**Stack size B when using optional extension arm increases by 150 mm per curtain!*

PARTS

A. STANDARD PARTS



SG 3060
Clamp

SG 3599
Hook

SG 6065
End stop



SG 6245
Spring stop

SG 6475p
Profile

SG 6476
End cover

SG 11300
2C glider

B. OPTIONAL PARTS



SG 2255
Brake



SG 2256
Brake

SG 3012
Hook

SG 3062
Connection bridge

SG 3582
Hook

SG 6057
Glider



SG 6082
Glider

SG 6349
Wave curtain tape

SG 6363
Wave top hemming tape



SG 6364
Wave extension



SG 6365
Wave hanger



SG 6366
Wave carrier for draw rod

SG 10075
Lead weight 50 g/m



SG 10076
Fabric weight



SG 10430
Draw rod 50 cm



SG 10431
Draw rod 75 cm



SG 10432
Draw rod 100 cm



SG 10433
Draw rod 125 cm



SG 10434
Draw rod 150 cm



SG 11295
End stop

SG 11301
2C glider on strip



SG 11302
Wave 2C glider cord 80 mm



SG 11303
Wave 2C glider cord 60 mm



SG 11305
2C glider for direct sewing