
SG 8500

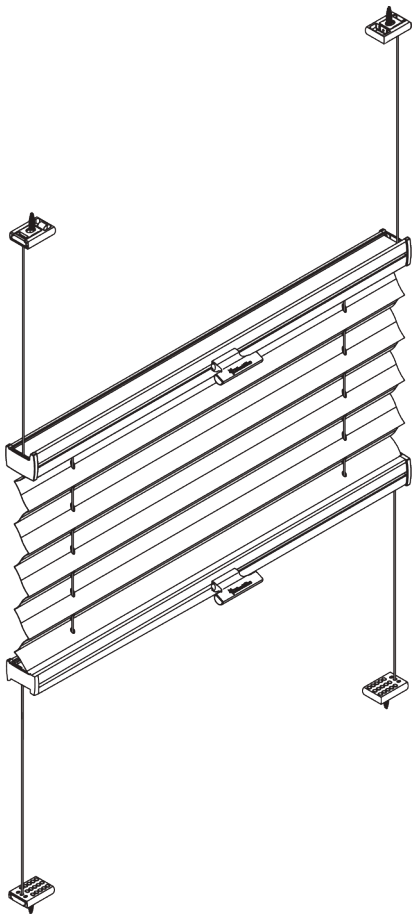

PRODUCT INFORMATION

- ***Operation:*** *handle*
- ***Range:*** *S - M*
- ***Fitting:*** *ceiling, wall, recess*
- ***Colours:*** *white, brushed aluminum*
- ***Fabrics:*** *refer to Silent Gliss pleated blind collection*

Features:


- *Versatile application options*
- *Flexible positioning of the fabric*

11/2026/V2

SilentGliss

OVERVIEW

Model name explanation

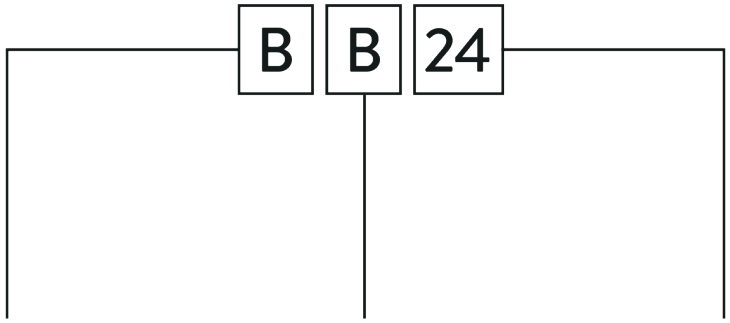

1. Letter	2. Letter	Character
Model for window / finish	*Operation*	*Window/fabric shape*
B *Vertical window (incl. turn-/tilt window up to a max. inclination of 15°), pleated blind with side-guide*	***B*** *Metal handle*	***20*** *Rectangle, 1 fabric freely positionable*

DIMENSIONS / FITTING

A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.

Dimensions Pleated Blind

Pleated Blind Type	Min. width (cm)	Max. width (cm)	Min. top width (cm)	Min. bottom width (cm)	Difference max. (cm)	Min. height (cm)	Max. height (cm)	Surface max. (m^2)	Min. angle	Max. angle
BB24	25	120				10	220	3		


Dimensions DUETTE Blind

DUETTE® Blind Type	Min. width (cm)	Max. width (cm)	Min. top width (cm)	Min. bottom width (cm)	Difference max. (cm)	Min. height (cm)	Max. height (cm)	Surface max. (m^2)	Min. angle	Max. angle
BB24	25	120				10	220	3 A)		

A: Please note: the max. system dimensions also depend on the fabric selection

B. MEASUREMENT

Inside Recess Fix

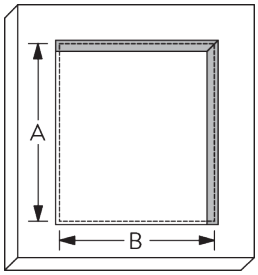

Rectangular shapes

Determine the clear dimensions and make any required deductions *(we recommend 0.5 cm in width and height).*


Please measure the width / height dimensions several times (interior of the room).

For inside recess fix use the smallest frame measurement.

The measurements given will be used unchanged.

Ordering width B = reveal width minus 0.5 cm
Ordering width A = reveal height minus 0.5 cm

Outside Recess Fix

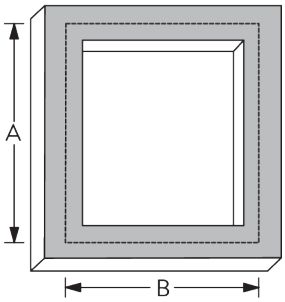

Rectangular shapes

Measure the dimensions and make any allowances, *consider any fixtures and fittings.*

Please measure the width / height dimensions several times (interior of the room).

For outside recess fix measure the size of the actual space.


Take into account any existing fittings or window furniture when mounting directly onto a frame.

The data given will be used unchanged.

Ordering widths B = reveal width plus allowances (left + right)
Ordering widths A = reveal height plus allowances (top + bottom)

C. FITTING OPTION

Fitting with clamp bracket (M4)

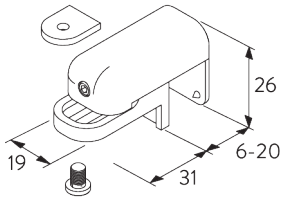

Clamp bracket for plastic windows


Important note for mounting with clamp brackets for plastic windows (M4):

When using clamp brackets for plastic windows the width can be measured as desired. Fittings, etc. must be taken into account. 2 cm must be subtracted from the wing height to obtain the ordering height.

PLEATED BLIND TYPE

A. VERTICAL WINDOWS UP TO 15° INCLINATION / RECTANGULAR SHAPE

BB24



Standard fitting:	*Top / Inside recess fix*
Fitting option:	*M4*
Operation:	*2 handles*
Stacking:	*At the top and bottom adjustable blind. With top and bottom side-guide fixing*

- *Pleated blinds with side-guides*
- *Up to 15° inclination*
- *Incl. tilt and turn windows*
- *Attention! Please note the minimum and maximum measurement restrictions in the tables on page 4!*

B. STACK SIZES (MEASUREMENTS IN CM)

Pleated blinds		Blind type
System height	FC	BB24
50	1	4,0
	2	4,5
	3	5,0
100	1	4,5
	2	5,5
	3	6,0
150	1	5,0
	2	6,0
	3	7,5
200	1	5,5
	2	7,0
	3	8,5
220	1	6,0
	2	7,5
	3	10,0

FC = Fabric class

DUETTE®		Blind type
System height	FC	BB24
50	2	5,5
	3	6,0
	4	7,0
	5	7,5
100	2	6,5
	3	7,5
	4	9,0
	5	10,5
150	2	7,5
	3	8,5
	4	11,0
	5	13,5
200	2	8,0
	3	10,0
	4	13,0
	5	
220	2	9,0
	3	11,0
	4	14,5
	5	

PARTS

A. STANDARD PARTS



SG 8325

Handle

B. OPTIONAL PARTS




SG 8501

Logoplate



SG 10742

Child safety cord cleat



SG 10745

Child safety break away cord connector



SG 10749

Eyelet



SG 10898

Child safety cord bush