
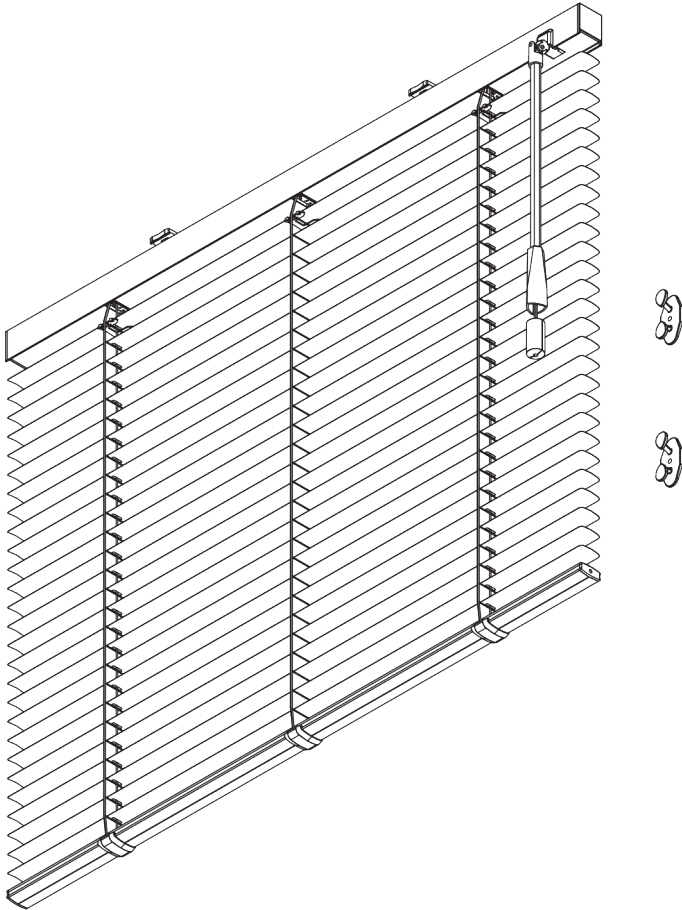


SG 8110



PRODUCT INFORMATION

- **Operation** control wand
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** refer to Silent Gliss slat collection

Features:


- Optimised light control
- Convenient turning of the slats using the control wand
- Multifunctional control wand
- Slat width: 25 mm (standard), 16 mm
- Privacy control (PC)

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS

25 mm slats: 3 m 16 mm slats: 2.5 m	28 cm	25 mm slats: 3 m 16 mm slats: 2.5 m	25 mm slats: 7 m ² 16 mm slats: 5 m ²

Slat stack heights

								
		50	100	150	200	250	300	
	25 mm (PC)	X	7	9	11	13	15	17
	16 mm	X	7	9	11	13	15	


(cm)

B. PROFILE

Profile information

SG 10037 Profile	SG 8003 Bottom bar 16 mm	SG 8004 Bottom bar 24 mm	SG 8120 Shaft

C. HOW TO MEASURE

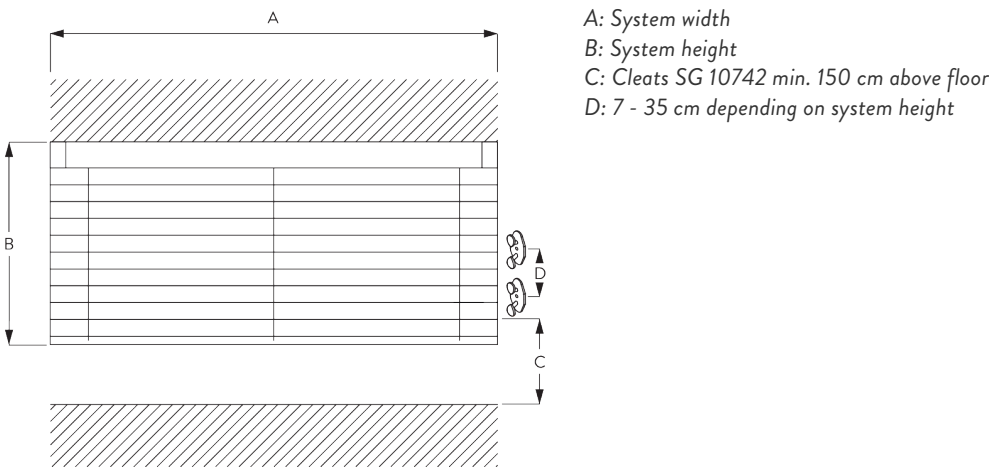

D. SPECIFICATION

TEXT

EN

Silent Gliss SG 8110 / SG 8110PC Wand Operated Venetian Blind. Comprising aluminium headrail SG 10037, universal brackets SG 10101, control wand (at set lengths), Left or right-hand operation. SG 8110PC version (25mm slats only) with concealed slot punching. System fixed to ceiling / wall at 800-1000 mm intervals plus one 50 mm from each end. Optional wall fix SG Smart extension brackets. Optional side-guide wires available for sloped applications up to 15° incline from vertical. Compliant to Child Safety Legislation EN13120 when used in conjunction with cleats SG 10742 and break away cord connector SG 10748. Slat to be chosen from Silent Gliss 16 mm or 25mm range, Price Group 1 / 2 / 3.

SV

Silent Gliss SG 8110 / SG 8110PC Persiennsystem med manövreringsstav. Består av aluminium kassett SG 10037, universal fästen SG 10101, manövreringsstav i anpassad längd. Manövrering i vänster eller höger sida. SG 8110PC versionen (endast 25 mm lameller) med dold hålbild i lamellerna. Systemet monteras i tak / på vägg 50 mm från varje ände samt c/c 800-1000 mm. Även väggmontering med Smart Fix fästen. Alternativ med sidewire för max. lutning 15 grader. Uppfyller med fäste SG 10742/10748 barnsäkerhetsnorm EN 13120. Färg lameller väljs från Silent Gliss kollektion med 16 / 25 mm prisgrupp 1-3.

NO

Silent Gliss SG 8300 Persiennsystem med betjeningsstav. Leveres på ønsket mål. Komplet med aluminiumskassett SG 10037 med universalfester SG 10101, betjeningsstav i tilpasset høyde. Betjening på høyre eller venstre side. SG 8110PC versjon (kun 25 mm lameller) med skjult hullstansing i lamellene. Systemet monteres i tak/vegg 50 mm fra hver ende, samt c/c 800-1000 mm. Også ved veggmontering med Smart Fix fester. Alternativt med sidewire for max. helning på 15 grader. Ved bruk av feste SG 10742 / SG 10748 oppfylles barnesikkerhetsnormen EN 13120. Farge på lamellene velges fra Silent Gliss kolleksjon med 16 / 25 mm, prisgruppe 1-3.

DA


Silent Gliss SG 8110 / SG 8110PC persienne med stangstyring. Består af aluminiumskassette SG 10037, universalbeslag SG 10101, kontrolstang (med indstillede længder), styring med venstre eller højre hånd. SG 8110PC version (kun 25 mm lameller) med skjulte lamelhuller. Systemet fastgøres til loft eller væg med afstande på 800-1000 mm plus en på 50mm fra hver ende. Kan også fastgøres på vag med SG Smart forlængerbeslag. Valgfri styrestreng fås til anvendelser med hældning op til 15° fra lodret. Overholder lovgivning om børnesikkerhed efter EN 13120. når den bruges i sammenhæng med klamper SG 10742 og snorforbindelse SG 10748. Lamel vælges fra Silent Gliss 16 mm eller 25 mm-programmet, prisgruppe 1 / 2 / 3.

FITTING


A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.

Fixing points





Side-by-side fitting

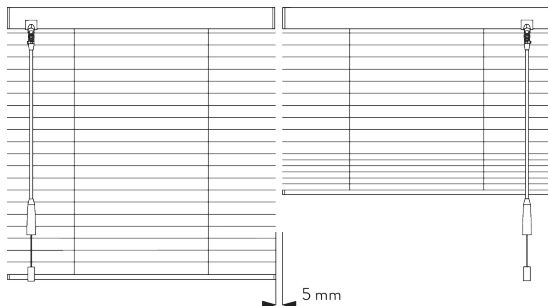

Min. distance: 5 mm

B. CEILING FITTING


Bracket SG 10101



SG 10101
Bracket


C. WALL FITTING

Smart Fix




Smart Fix SG 11200 - SG 11201 and bracket SG 10101:
Screw SG 10395 (M4x6) needed.


<i>Smart Fix</i>	<i>X mm</i>
SG 11200 / SG 11210	57-59
SG 11201 / SG 11211	77-79
SG 11154	107-135
SG 11155	137-165
SG 11156	187-215



**Square Smart Fix SG 11210 - SG 11211
and bracket SG 10101:**
Screw SG 10395 (M4x6) needed.

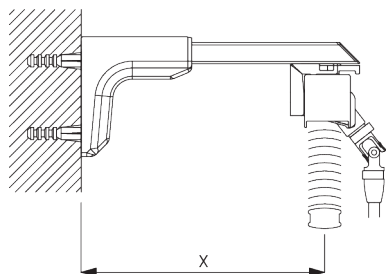

**Universal Smart Fix SG 11154 - SG 11156
and bracket SG 10101:**
Screw SG 10407 (M4x10) needed.




SG 10101
Bracket




SG 10395
Pan head screw M4x6




SG 10407
Pan head screw M4x10




SG 11200
Smart Fix 60 mm




SG 11201
Smart Fix 80 mm




SG 11210
Square Smart Fix 60 mm




SG 11211
Square Smart Fix 80 mm



SG 11154
Universal Smart Fix 120 mm





SG 11155
Universal Smart Fix 150 mm






SG 11156
Universal Smart Fix 200 mm

Bracket SG 10101




SG 10101
Bracket

D. FITTING WITH SIDE GUIDE OPTION




SG 8235

Side guide wire base short




SG 8236

Side guide wire base long




SG 8237

Side guide wire holder




SG 8241

Side guide eyelet



SG 8249

Side guide device




SG 10120

Side guide wire $\varnothing$ 0.9 mm

SYSTEM OPTIONS


A. PRIVACY CONTROL (PC)

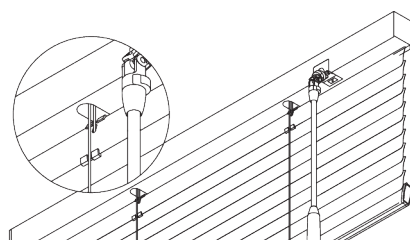

To avoid direct light ingress when slats are closed.

For 25 mm slats only. Not applicable with side guides.

B. SIDE GUIDES

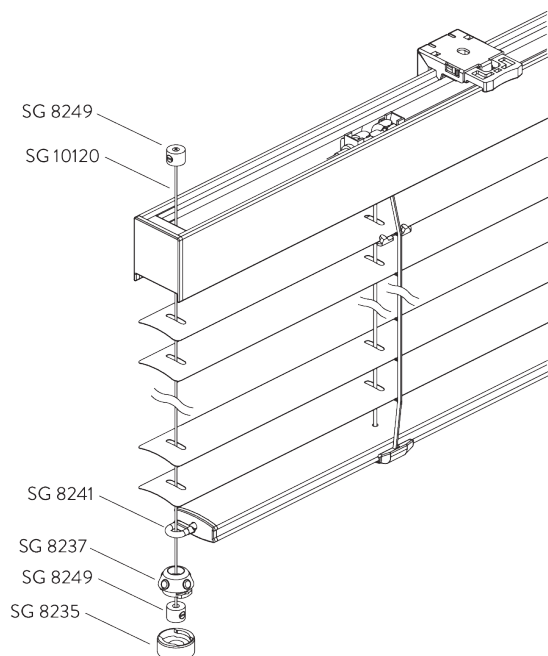

Additional parts:









- 2x SG 8235 Side guide wire base short
- 2x SG 8237 Side guide wire holder
- 2x SG 8241 Side guide eyelet
- 4x SG 8249 Side guide device
- 2x SG 10120 Side guide wire $\varnothing$ 0.9 mm






Note:

- Up to 15° from vertical





PARTS

A. STANDARD PARTS

	SG 8004 Bottom bar 24 mm
	SG 8007 Slat 25 mm
	SG 8011 Lift cord ø 1.2 mm
	SG 8013 Bottom clip 25 mm
	SG 8120 Shaft
	SG 8239 End cover 25 mm
	SG 10037 Profile
	SG 10077 End cover
	SG 10081 Shaft stop
	SG 10086 Tilter holder without pulley
	SG 10087 Tilter holder with pulley
	SG 10088 Tilter
	SG 10101 Bracket
	SG 10104 Slat clip 25 mm


	SG 10117 Ladder cord 25 mm
	SG 10742 Child safety cord cleat
	SG 10748 Child safety break away cord connector
	SG 10898 Child safety cord bush
	SG 11491 Gear box
	SG 11492 Gear box cover
	SG 11496 Control wand 680 mm
	SG 11509 Cord stop
	SG 11510 Cord stop cover
	SG 11511 Tilter holder with pulley
	SG 11512 Cord end cap

B. OPTIONAL PARTS


	SG 8003 Bottom bar 16 mm
	SG 8006 Slat 16 mm
	SG 8012 Bottom clip 16 mm
	SG 8109 Slat clip 25 mm
	SG 8235 Side guide wire base short
	SG 8236 Side guide wire base long
	SG 8237 Side guide wire holder
	SG 8238 End cover 16 mm
	SG 8241 Side guide eyelet
	SG 8249 Side guide device
	SG 10109 Slat clip 16 mm
	SG 10116 Ladder cord 16 mm
	SG 10118 Ladder cord 25 mm PC
	SG 10120 Side guide wire ø 0.9 mm

**SG 10395**


Pan head screw M4x6

**SG 10407**


Pan head screw M4x10

**SG 10745**


Child safety break away cord connector

**SG 11154**


Universal Smart Fix 120 mm

**SG 11155**


Universal Smart Fix 150 mm

**SG 11156**


Universal Smart Fix 200 mm

**SG 11200**


Smart Fix 60 mm

**SG 11201**

Smart Fix 80 mm

**SG 11210**

Square Smart Fix 60 mm

**SG 11211**

Square Smart Fix 80 mm

**SG 11494**

Control wand 320 mm

**SG 11495**

Control wand 480 mm

**SG 11497**

Control wand 880 mm

**SG 11498**

Control wand 1080 mm

**SG 11499**


Control wand 1280 mm

**SG 11501**


Extension 900 mm

**SG 11505**

Control wand for extension 580 mm

**SG 11506**

Control wand for extension 780 mm

**SG 11516**

Wedge

